

Diagnostic Evaluation of Exhaust Gas Recirculation (EGR) System on Gasoline Electric Hybrid Vehicle

Sumanth Reddy Dadam, Robert Jentz, Tyler Lenzen and Herb Meissner (**Do NOT enter this information. It will be pulled from participant tab in MyTechZone**)

Affiliation (**Do NOT enter this information. It will be pulled from participant tab in MyTechZone**)

ABSTRACT

Diagnosing the Exhaust Gas Recirculation (EGR) Valve remains one of the most challenging problems in emissions control systems diagnostics. California Air Resources Board (CARB) has started imposing specific requirements on automotive companies since 2011 that required the integration of on-board diagnostics (OBD) monitor for the detection and reporting of this type of control malfunction. In this paper, some methodologies of EGR valve system monitoring are investigated and a novel approach is proposed that shows reliable detection capability compared to the other methods. The proposed method requires certain conditions during deceleration fuel shutoff events to intrusively reactivate the EGR system and determine the obstructed valve condition. The method was evaluated on a 2.5L iVCT engine in an experimental Ford Escape Full Hybrid Electric vehicle. Vehicle results are shown and discussed.

INTRODUCTION

Engine systems utilize recirculation of exhaust gas from an engine exhaust system to an engine intake system, a process referred to as exhaust gas recirculation (EGR), to reduce regulated emissions and gain fuel economy. An EGR valve would be controlled to achieve a desired intake air dilution for the given engine operating conditions. Traditionally, the amount of low pressure EGR (LP-EGR) and/or high pressure EGR (HP-EGR) routed through the EGR system is measured and adjusted based on engine speed, engine temperature, and load during engine operation to maintain desirable combustion stability of the engine while providing emissions and fuel economy benefits. EGR effectively cools combustion chamber temperatures thereby reducing NO_x formation. In hybrid vehicles, EGR is continually scheduled when the vehicle is propelled using engine torque (engine is on) to increase fuel economy and engine efficiency. A diagnostic procedure is need to be periodically or opportunistically carried out to monitor operation of the EGR system when the valve is requested to be closed. Based on CARB regulations, the OBD II system shall detect a malfunction when either the EGR system has reached its control limits such that it cannot reduce EGR flow to achieve the commanded flow rate or, for non-feedback controlled EGR systems, the EGR system has maximum detectable EGR flow when little or no EGR flow is expected. One of the methods for detecting restrictions in the EGR system during steady-state engine operations relies on air pressure in the intake manifold, Air pressure in the engine intake manifold is monitored over a test period while an amount (determined based on engine operating conditions) of EGR is delivered to the intake manifold. Changes in the monitored air pressure are filtered through a lag filter process comprising a dynamic filter coefficient. The filtered air pressure is then compared

to a dynamic threshold to determine presence of a restriction or leak in the EGR system. Many issues, however, are associated with this method wherein the system may not be able to detect undesired EGR flow occurring when EGR is not requested (e.g. valve is shut). In hybrid vehicles, during engine operation, EGR flow is commanded off during idle and boosted conditions only – however the idle time is severely limited. Some Ford hybrid vehicles are naturally aspirated (no boost) and the engine is commanded to shut-down at low torque demand conditions (idle/decelerations). There is limited to no opportunity to detect excessive flow faults when the EGR valve is expected to be closed. CARB Regulation states that the EGR valve is required to be monitored in “all conditions” including when the valve is commanded closed. The performance and robustness of this type of detection is problematic on hybrid vehicle due to limited engine operation time and the period of engine operation may not be sufficient to gather a complete set of data indicative of degradation of the EGR valve.

A new method is proposed to detect stuck EGR valve by estimating a ratio of accumulated difference between a measured EGR flow and an EGR limit to accumulated intake air flow, over a duration of time, and indicating EGR system degradation in response to the ratio being higher than a threshold. The magnitude of the ratio was used to indicate whether the obstructed EGR valve condition is present or not. A non intrusive diagnostics method is proposed that interfaces with an engine shut-down request, prior to engine spin-down, rotating the engine at an idling speed via an electric motor (forcing the engine to remain on during decel fuel shutoff) and carrying out diagnostics of the EGR system.

The EGR valve system monitoring remains a challenging problem due to the fact that the system only monitors in certain operating conditions in order to be able to use the inputs from one or more EGR sensors such as an EGR delta pressure sensor and an EGR absolute pressure sensor in their prime detection region (not at limits). A typical engine bank will have EGR delta pressure sensor and an EGR absolute pressure sensor coupled to the EGR system along with an EGR temperature sensor. EGR flow rate is inferred by the temperature, pressure, humidity, and air-fuel ratio sensors coupled to the compressor inlet. These sensors are used to control the EGR being commanded to the engine cylinders to maintain stoichiometric operation while maximizing fuel economy and meeting emissions targets.

EGR flow is estimated by measuring the delta pressure across the orifice with an EGRP sensor (Exhaust Gas Recirculation Pressure) and translating that against a transfer function with a given mass flow based on an orifice size. The desired EGR flow rate is computed from the desired airflow and the desired EGR rate, The EGR valve state

machine that determines the percent opening of the valve checks for desired EGR flow rate and applies corrections based on to EGR temperature and desired MAP. The EGR valve opening command is a translation of the desired EGR flow rate internal to the control system.

Sensor set of EGR Delta Pressure Sensor (EGRP), DC Motor Position (EGRPV), EGR Temperature (EGRT) and EGR Pressure (EXP) are important to obtain accurate controls of the closed loop control system and they must be located properly in order to sense accurately (see Figure 1).

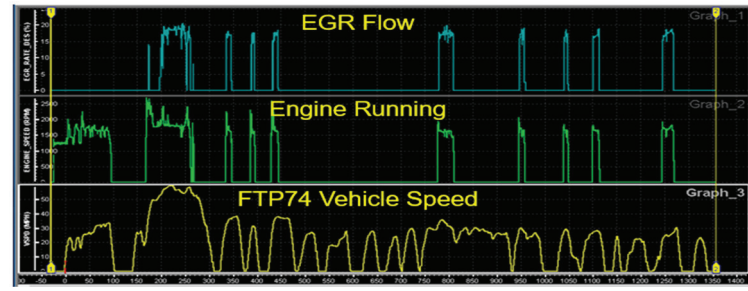


Figure 2. EGR test data from a 2.5L iVCT engine

Some hybrid vehicles are naturally aspirated (no boost) and the engine is commanded to shutdown at low torque demand conditions (limited idle). The data displayed in fig.(2) shows that there is limited to no opportunity to detect excessive EGR flow faults when the EGR valve is expected to be closed (i.e. a EGR valve obstruction in an idle condition). Under normal conditions the Hybrid Electric Vehicles (HEV) will command EGR flow any time the gas engine is running and when the vehicle comes to stop engine is shut off with no engine idle time. With regulations requiring to detect the EGR system when no EGR flow is commanded and limitations on hybrid vehicle with inability to operate at engine idle time, this drives a need for a new approach to detect EGR excess flow at no EGR flow commanded conditions.

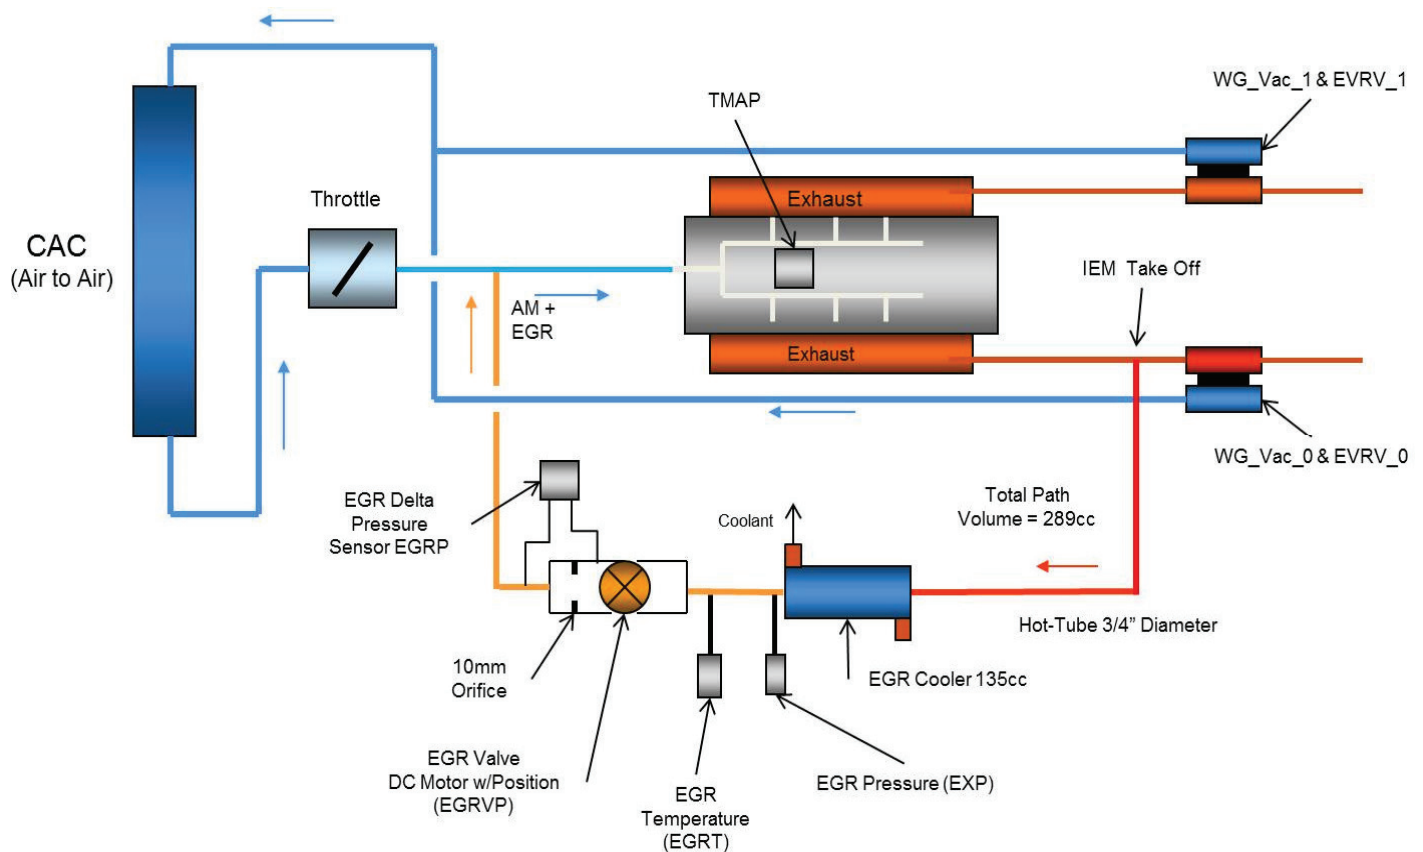


Figure 1. Schematic of a High Pressure EGR (HPEGR) subsystem of 2.5L iVCT engine. Hardware components consist of EGR tubing, Measuring Orifice, EGR Cooler, Coolant Hoses and DC Motor EGR valve. Sensor set consists of EGR Delta Pressure Sensor (EGRP), DC Motor Position (EGRPV), EGR Temperature (EGRT) and EGR Pressure (EXP)

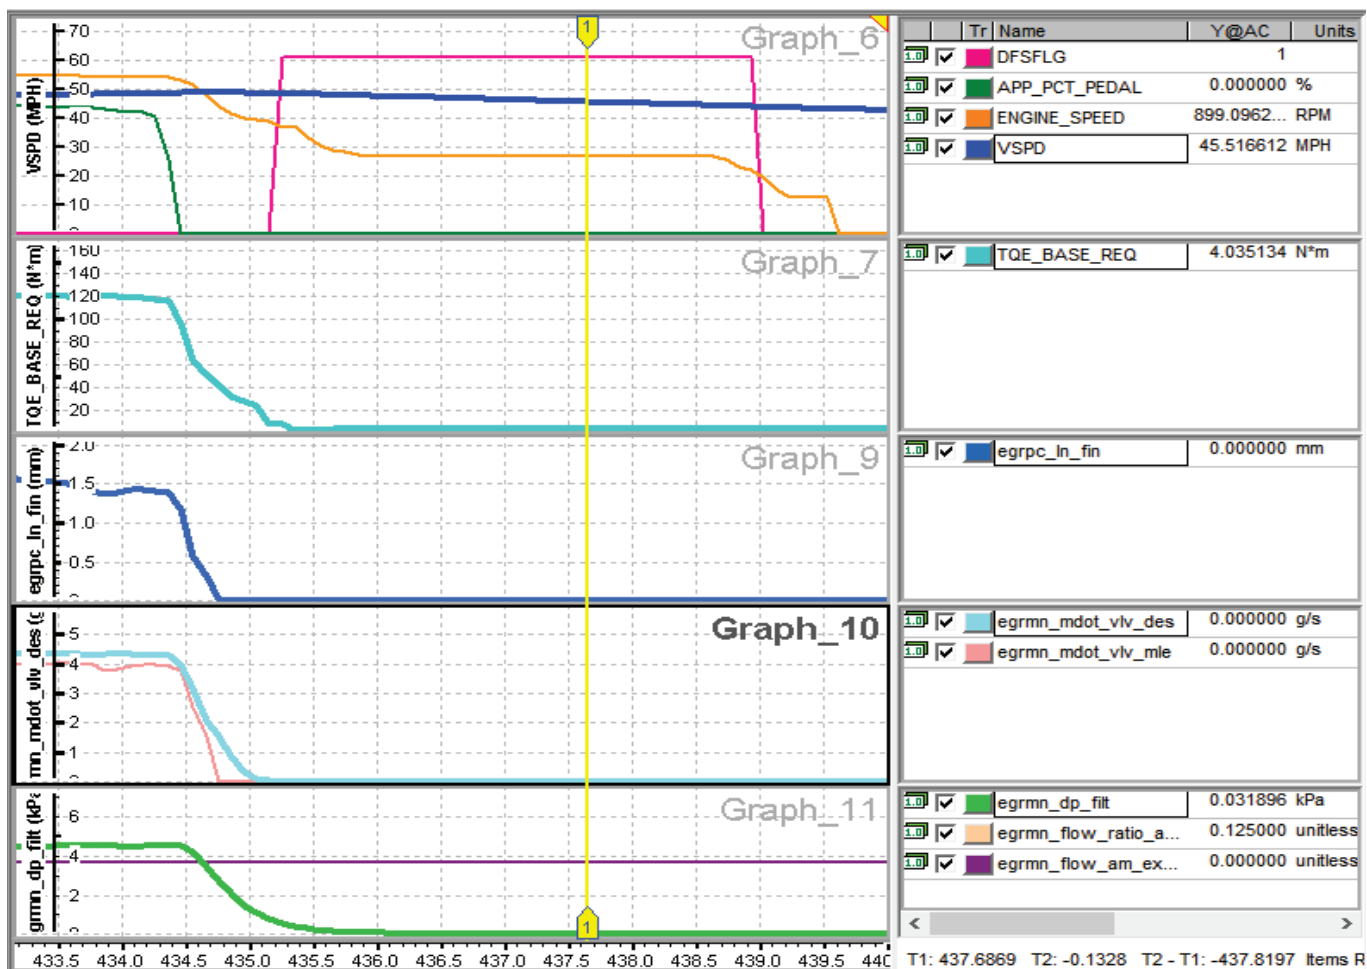


Figure 6: Baseline Operation (no fault detected)

As a sharp contrast to Figure 6, Figure 7 details the results when injecting a fault into the EGR valve system. The valve itself was not allowed to close (as can be seen in Graph 9 – not zero value) and in Graph 10 the EGR flow monitor showed a value of EGR flow being read when it was not commanded (MLE vs DES). Graph 10 also shows the total air mass accumulation reaching the calibratable max (750g/s in this case) and the monitor making a judgement call on the fault ratio of EGR mass (time stamp 56.5s). In this case, the valve was stuck open enough to set a fault with the program's current calibration, egr excess flow ratio exceeded its threshold limits and a fault code was set at the end of the diagnostic routine.

SUMMARY

This paper detailed the new technology used by Ford Motor Company for the diagnostics of an obstructed EGR Valve during valve closed conditions on Hybrid vehicles. The method shows a robust capability in estimating the fault conditions in the presence of stuck valve conditions. The application of the proposed method is limited to cases where the EGR valve is stuck open when it is requested to be closed at or below the EGR valve internal position sensor detection range.

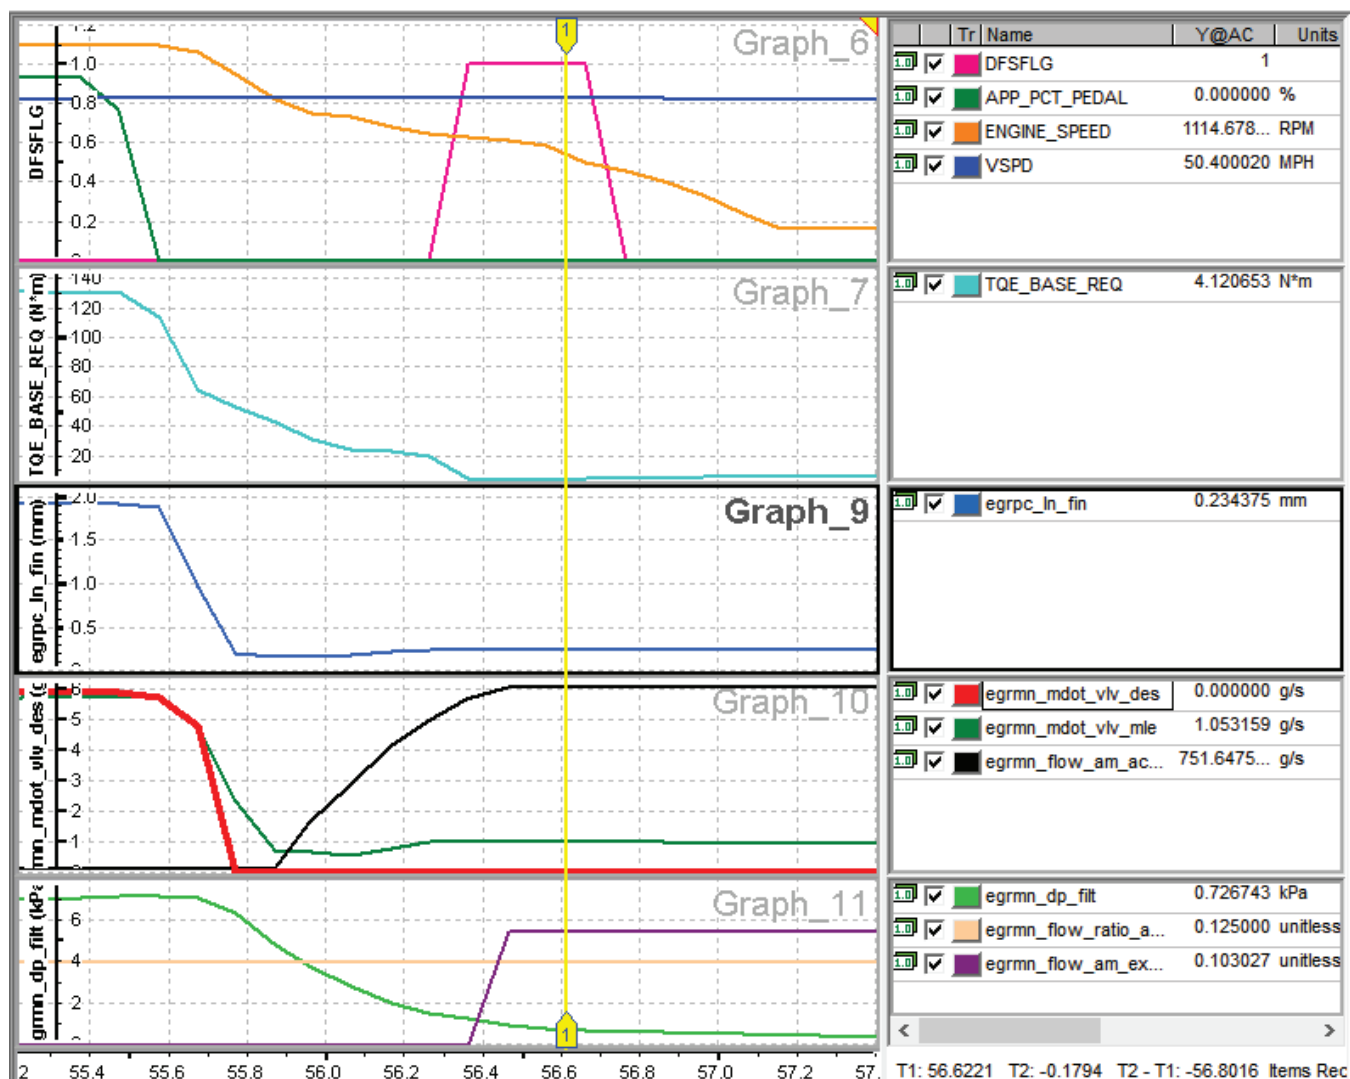


Figure 7: Fault Detected once total airmass reached

REFERENCES

1. Sumanth Dadam, Tyler Lenzen, Herb Meissner and Jentz R. Method and System for Exhaust Gas Recirculation System Diagnostics, US Patent App. 16/005486; 2018
2. Jentz R., Scott T., and Pat Smith. Method and system for exhaust gas recirculation system diagnostics US Patent App. 15/414510; 2017
3. David R. Wade. Exhaust gas recirculation diagnostic, U.S. Patent 5508926
4. CARB, Title 13, California Code Regulations, Section 1968.2. Malfunction and Diagnostic System Requirements - 2004 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines
5. Jessa F. Fang-Cheng. Exhaust gas recirculation system diagnostic; U.S. Patent US5621167A
6. David Karl Bidner, Douglas Raymond Martin. Exhaust gas recirculation fault detection system; US Patent US6164270A
7. Satoru Osaki, Toshio Hori, Osamu Matsuno, Takeshi Tsuyuki. Failure diagnosis apparatus for exhaust gas recirculation system; U.S. Patent US6508111B2

Nomenclature

The following symbols are used in this paper :

DFSFLG	Decel fuel shutoff requested State (unitless)
APP_PCT_PEDAL	Percent of total pedal travel (%)
ENGINE_SPEED	Engine Speed (rpm)
VSPD	Vehicle Speed (mph)
TQE_BASE_REQ	Requested base engine torque (Nm)
EGRPC_LN_FN	Linear EGR valve position (mm)
EGRMN_MDOT_VLV_DES	Desired EGR valve flow rate (g/sec)
EGRMN_MDOT_VLV_MLE	Maximum Likelihood estimate of EGR flow rate (g/sec)
EGRMN_DP_FILT	Filtered delta pressure across the orifice (kpa)
EGRMN_FLOW_RATIO_A	Ratio of accumulated egr mass flow error to intake air mass flow (unitless)
EGRMN_FLOW_AM_EX	Ratio of Excessive Flow / Air Mass (unitless)
EGRMN_FLOW_AM_AC	Accumulated intake air mass (g/sec)
DTC	Diagnostic Trouble Code
MIL	Malfunction Indicator Lamp